



6MP 10CH 1SATA NVR

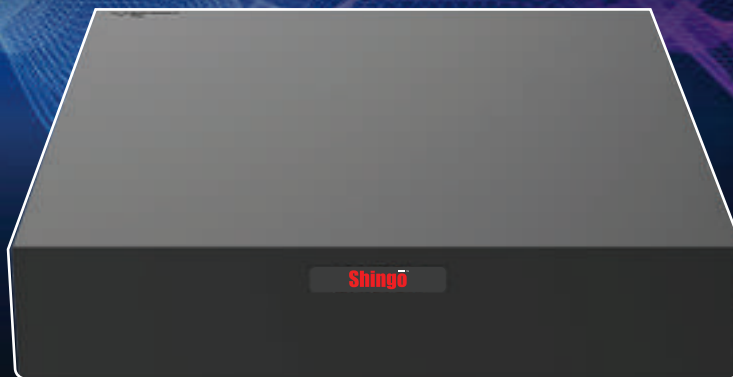

Model: NVR3110L

Technical Specifications

Decoding Format	Ultra 265,H.265,H.264
Decoding Capability	1 x 6MP@30, 1 x 5MP@30, 2 x 4MP@30, 2 x 3MP@30, 6 x 1080P@30, 8 x 720P@30, 10 x D1
Audio Compression	G.711A,G.711U
Network	Description
Incoming Bandwidth	64Mbps
Outgoing Bandwidth	48Mbps
Remote Users	128
Protocols	TCP/IP,P2P,UPnP,DHCP,HTTP,HTTPS,DNS,DDNS,SMTP,RTSP
Browser(Plugin)	Windows:IE(IE10/11),Firefox (version 52.0 and above),Chrome(version 45 and above),Edge(version 79 and above)
Video/Audio Input	Description
IP Video Input	10-ch
Video/Audio Output	Description
HDMI Output	HDMI:1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	VGA:1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
3.5mm Audio Output	1-ch
Liveview Display	1/4/6/8/9/10
Corridor Mode Screen	3/4/5/7/9/10
Recording	Description
Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Synchronous Playback in Local	10-ch
Smart	Description
VCA Detection by IPC	SIP(Intrusion Detection,Cross Line Detection,Enter Area,Leave Area)
VCA Search	Behavior Search
Smart by IPC	Total 4-ch(SIP supports channel 1-4,Alarm only,no image)
Hard Disk	Description
SATA	1 SATA Interface
Capacity	Up to 6TB for each HDD
External Interface	Description
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 2 x USB2.0
Power Supply	DC 12V/2A
Working Environment	Description
Working Temperature	-10° C ~ +55° C (+14° F ~ +131° F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤ 7W
Dimensions	Description
Weight (without HDD)	≤ 1.0Kg (2.20lb)
Dimensions	190mm × 195mm × 42mm (7.5"× 7.7"× 1.6")
Certification	Description
Certification	CE,FCC,RoHS,WEEE
CE	EN 55032,EN 61000-3-3,EN IEC 61000-3-2,EN 55035
FCC	Part15 Subpart B

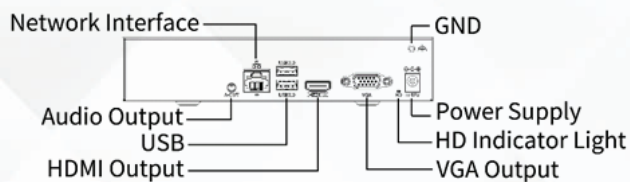

Key Features

- ⊙ Support Ultra 265/H.265/H.264 video formats
- ⊙ 6/10/16-channel input
- ⊙ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ⊙ Support 1-ch HDMI, 1-ch VGA
- ⊙ HDMI and VGA simultaneous output
- ⊙ Up to 6MP resolution recording
- ⊙ 1 SATA HDD up to 6TB
- ⊙ Support cloud upgrade